
AWESOMATIX A800RR


This form has been optimized for use with Adobe Acrobat.
Use of alternative PDF readers may result in formatting, display, or data entry issues.

NAME Jeff Rowland
RACE On Road Sundays - Ice, Ice, Baby
TRACK First State Hobbies
COUNTRY United States CLASS 21.5T

DATE 08.11.2026 TEMP. °C AIR / TRACK 74F / 74F
TRACK SURFACE ASPHALT ☐ CARPET ☑
TRACK LAYOUT TECHNICAL ☐ MIXED ☐ FAST ☑
TRACTION LOW ☐ MEDIUM ☑ HIGH ☐

FRONT

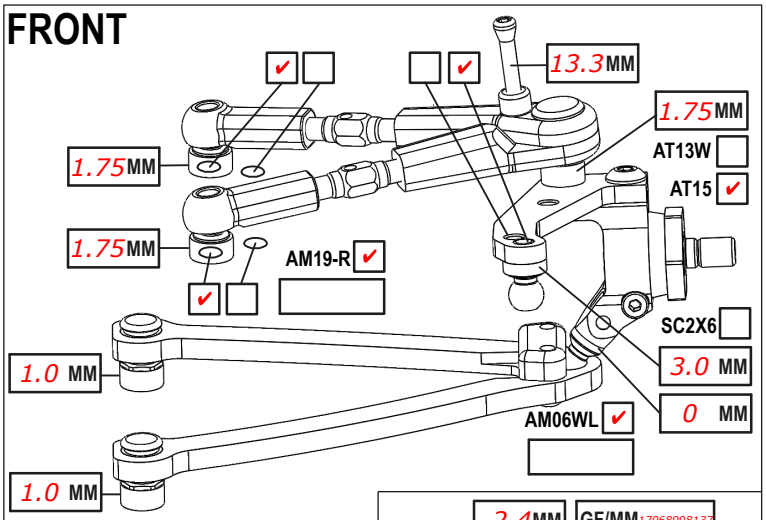


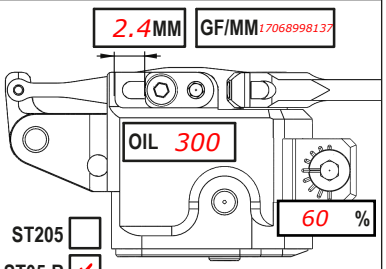


CAMBER ANGLE /°	2.0
CASTER ANGLE /°	4.0
TOE ANGLE /°	1.0
RIDE HEIGHT / MM	5.0
DOWNSTOP / MM	5.8
UPSTOP / MM	20.6
ANTI-ROLL BAR Ø / MM	1.0
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM14LS ☐	AM14H
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE SPOOL ☑ DIFF ☐	
DRIVE POS. DOWN ☑ UP ☐ +1 ☐	
DIFF OIL	DIFF SHIMS

DAMPER D4 ☑	
ROTOR 2 HOLES ☑	
SPRING STD ☐	S ☑
SRS/RHS ARR. I ☑	II ☐
PSS SETUP 30% ☐	25% ☐ 15% ☐
DAMPING LINEAR ☐	P1 ☐ P2 ☑
DAMPER SPACER / MM	0.5mm
C45 YES ☐	NO ☑

REAR

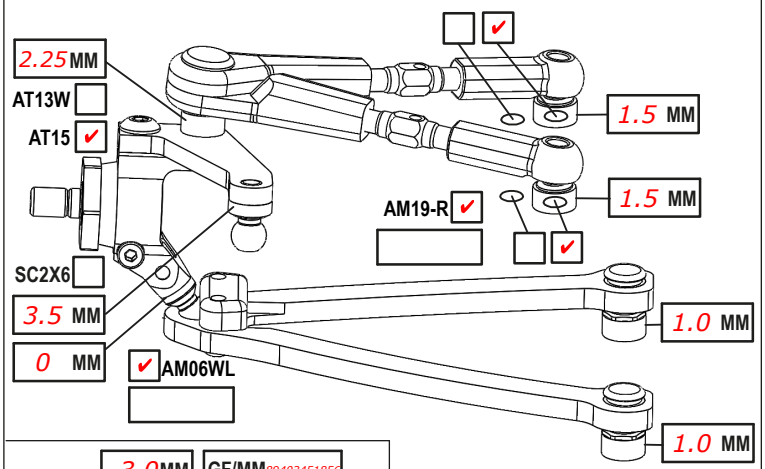


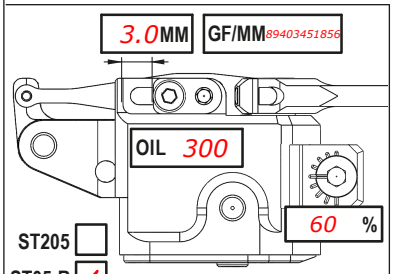


CAMBER ANGLE /°	2.0
CASTER ANGLE /°	3.0
TOE ANGLE /°	2.5
RIDE HEIGHT / MM	5.2
DOWNSTOP / MM	5.2
UPSTOP / MM	20.6
ANTI-ROLL BAR Ø / MM	1.1
ARB STIFFENER 1/4 ☐ 1/2 ☐ 3/4 ☐ 1 ☐	
LOWER ARM EXTENSION / MM	0
STEER. ARM AM23-1 ☑	
2ND SPRING SPR-P2 ☐ P1 ☐	
WHEEL SPACER / MM	0
DRIVE DIFF ☑	
DRIVE POS. DOWN ☑ UP ☐ +1 ☐	
DIFF OIL 10k	DIFF SHIMS SH5x7x0.4

DAMPER D4 ☑	
ROTOR 2 HOLES ☑	
SPRING STD ☐	S ☑
SRS/RHS ARR. I ☑	II ☐
PSS SETUP 30% ☐	25% ☐ 15% ☐
DAMPING LINEAR ☐	P1 ☐ P2 ☑
DAMPER SPACER / MM	0.5mm
C45 YES ☑	NO ☐

CHASSIS FLEX AND WEIGHT SETTINGS

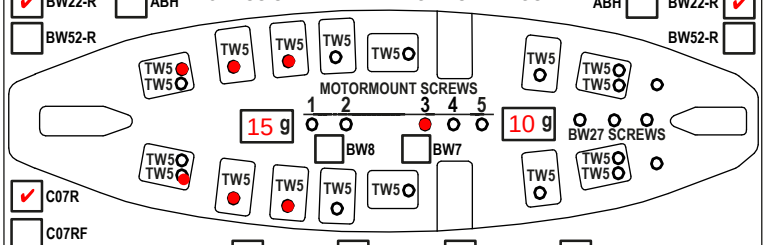


☑ BW22-R ☐ ABH ☐ BW52-R
ABH ☐ BW22-R ☑ BW52-R
☑ C07R ☐ C07RF
LOWER DECK C01B-RAF ☐ C01B-RC ☐ C01B-RS ☐ C01B-RSL ☑ OTHER
☐ BUMPER TOP PLATE CUT FRONT BUMPER P15L ☐ OTHER MXLR(M-Flex)




FRONT TOP DECK C127 ☐ C127S ☐ OTHER C127S-1.6
REAR TOP DECK C127 ☐ C127S ☐ OTHER C127S-1.6
SINGLE TOP DECK C27MMX ☐ OTHER
BELT TESIONER AM279 ☑ OTHER

BODY POSITION

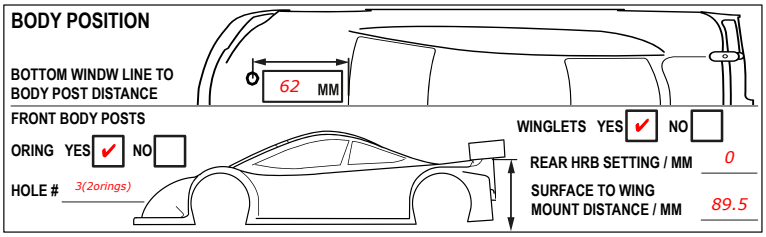

BOTTOM WINDW LINE TO BODY POST DISTANCE
FRONT BODY POSTS
ORING YES ☑ NO ☐
HOLE # 3(2orings)
WINGLETS YES ☑ NO ☐
REAR HRB SETTING / MM 0
SURFACE TO WING MOUNT DISTANCE / MM 89.5

TIRES Gravity
INSERTS
SIDEWALLS GLUE Ø / MM F 0 R 0
ADDITIVE SXT 3.0
TOTAL WEIGHT 1304
NOTES: Clean with motor spray



TIME MIN. F 6 R 6
WEIGHT DISTRIBUTION % F 50.2 R 49.8

MOTOR LATERAL SHIFT / MM 0	SERVO Sanwa PGS-LH II
MOTOR Hobbywing V10 G5 21.5	SERVO HORN / HEIGHT Xray Hard Saver/17mm
SPUR 89 PINION 47 RATIO 2340425532	ACKERMANN POSITION Back
BODY ZooRacing Wolverine MAX 0.4	STEER. TRAVEL IN 24 OUT
WING Xtreme Twister 0.4	BATTERY TeamEAM 5400
ESC Hobbywing XR10 Pro G3X	RECEIVER Sanwa RX-492
ESC SETTINGS Blinky	RADIO Sanwa M17
BEST LAPTIME 9.281	QUALIF./FINAL POSITION 1 / 1

COMMENTS:
MR33 oils; FSS; RCMaker rear body holders; 5g in front of servo; 20g under receiver; 17g between motor and esc