



NAME **Christian Drieble**
 COUNTRY **Germany**
 RACE **ETS 2016 Round 4**
 TRACK **Riccione**

DATE **15/05/2016** TEMP.°C AIR / TRACK **30°C / 25°C**
 TRACK CONDITION TECHNICAL ☐ MIXED ☐ FAST ☒
 TRACTION LOW ☒ MEDIUM ☒ HIGH ☐

FRONT

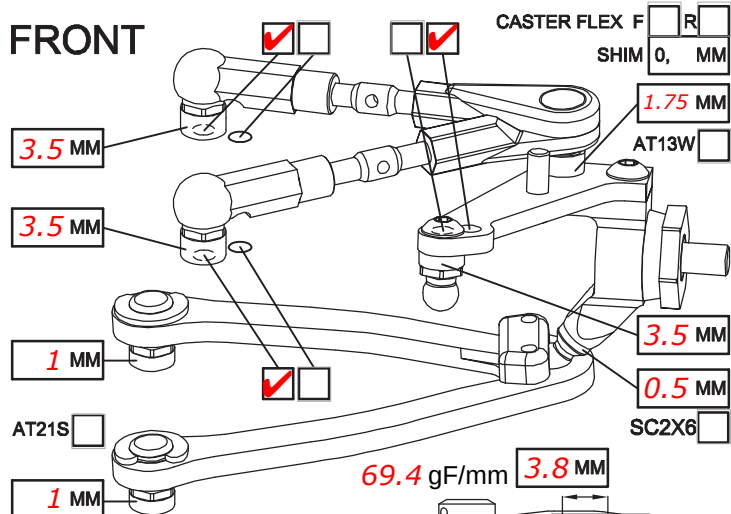


CAMBER ANGLE / ° **2.5**
 CASTER ANGLE / ° **4**
 TOE ANGLE / ° **1 each side**
 RIDE HEIGHT / MM **5.2**
 DOWNSTOP / MM **5.6**
 UPSTOP / MM **-**
 STABILIZER Ø / MM **1.2**
 LOW ARM C04AL ☐ +0.5mm ☒
 STEERING ARM STD ☒
 WHEEL SPACER / MM **-**

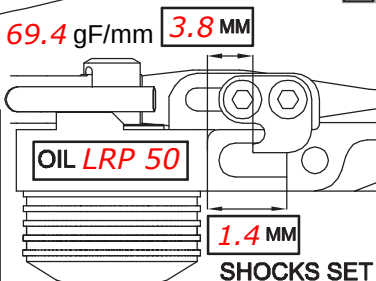

ROTOR STD ☒
 SPRING STD ☐ S ☒
 DAMPER D2.1 ☒
 ACTION SYM. ☒ ASYM. ☐
 SRS/RHS ARR. I ☒ II ☐

FRONT DRIVE ☐ GD3 ☐ SPOOL ☒ GD2B ☐
 DIFF OIL ☐ DIFF WASHERS ☐
 DOGBONE DRIVE ST17-1 ☒ ST11 ☐ ST12 ☐ BB ☐ ST02 ☐

REAR


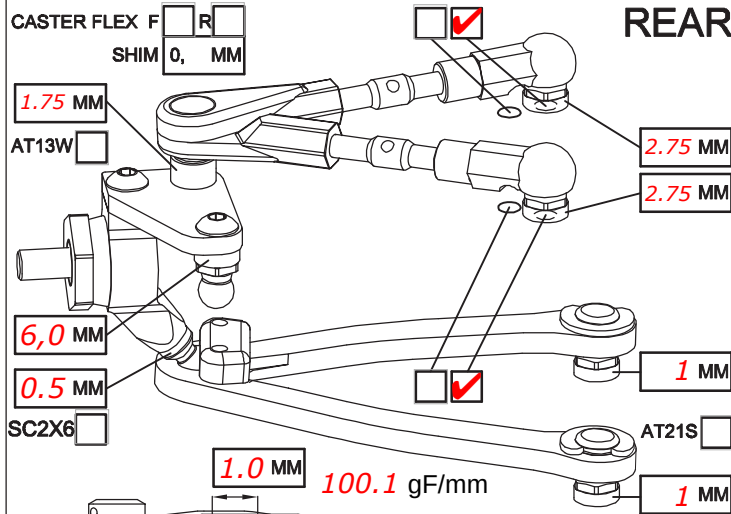


CAMBER ANGLE / ° **2.5**
 CASTER ANGLE / ° **0**
 TOE ANGLE / ° **2.5**
 RIDE HEIGHT / MM **5.4**
 DOWNSTOP / MM **4.8**
 UPSTOP / MM **-**
 STABILIZER Ø / MM **1.1**
 LOW ARM C04AL ☐ C04M ☒
 STEERING ARM STD ☒
 WHEEL SPACER / MM **-**

ROTOR STD ☒
 SPRING STD ☐ S ☒
 DAMPER D2.1 ☒
 ACTION SYM. ☒ ASYM. ☐
 SRS/RHS ARR. I ☒ II ☐


REAR DRIVE ☐ GD3R ☐ GD2B ☒
 DIFF OIL **3000** DIFF WASHERS **std**
 DOGBONE DRIVE ST11 ☐ ST12 ☐ BB ☒ ST17-1 ☐ EVD ☐

FRAME FLEX SETTING

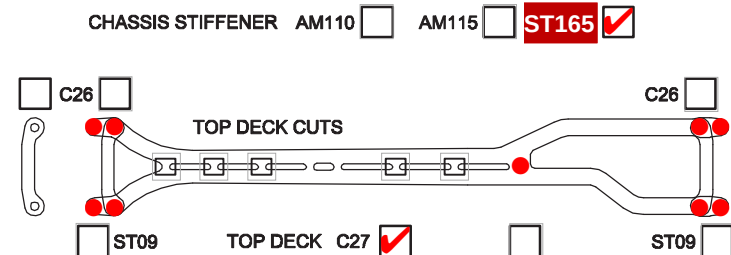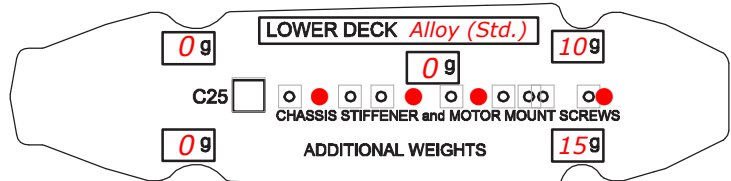

COMMENTS

Top deck center screw is set screw
Motor Fan (15g) @rear left weights position
Chassis stiffener ST165
AM19-4 front and rear, no front C26 brace

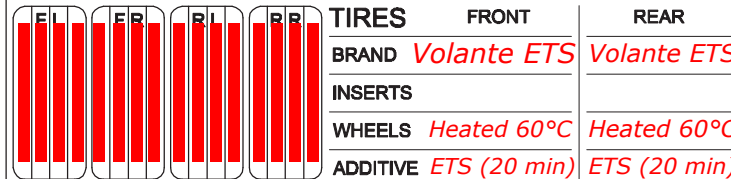

MOTOR LATERAL SHIFT / MM **1**
 ACKERMANN SHIMS / MM **1**
 DRIVE RATIO **4.5**
 SPUR **100** PINION **42**
 BODY **Bittydesign M15**
 WING **-**
 MOTOR **ETS 13.5T**
 SERVO **Sanwa SRG-BLS**
 ESC **MM Fleeta ETS Stock**
 BATTERY **Silverb. Spiral II**
 RECEIVER **Sanwa**

BEST LAPTIME **19.60** QUALIF. / FINAL POSITION **30 / 24**
 ESC SETTING **0-Boost**

COMMENTS / IMPRESSIONS

Based on mixed asphalt setups by Nicolas Delise, Atsushi Hara, Colin Jackson, etc.
Very high corner speed, yet easy to drive.

CONTACT