


NAME **Max Mächler**
COUNTRY **Italy**
RACE **Charity Race 2017**
TRACK **RcLandia Scandiano**

DATE **14-15.01.2017** TEMP. °C AIR / TRACK °C / °C
ASPHALT ☐ (OUTDOOR ☐ INDOOR ☐ CARPET ☒
TRACK CONDITION TECHNICAL ☐ MIXED ☐ FAST ☒
TRACTION LOW ☐ MEDIUM ☐ HIGH ☒

FRONT

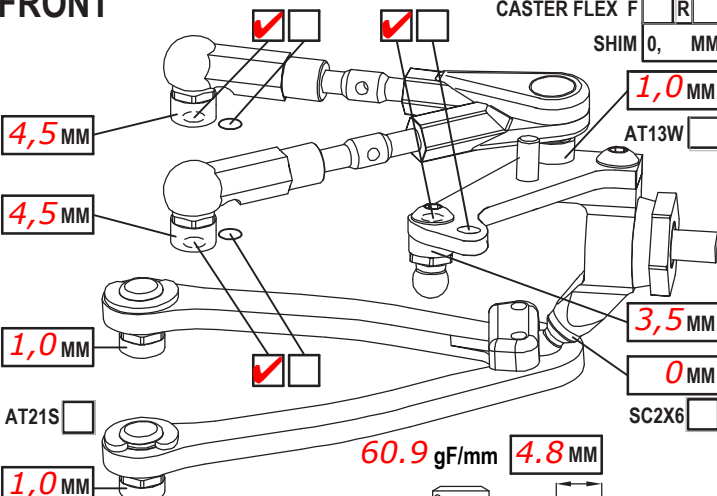


CASTER FLEX F ☐ R ☐
SHIM 0, MM
AT13W ☐ 1,0 MM
AT21S ☐ 3,5 MM
SC2X6 ☐ 0 MM
60.9 gF/mm 4.8 MM
1,0 MM

CAMBER ANGLE / ° **2**
CASTER ANGLE / ° **4**
TOE ANGLE / ° **1 per side**
RIDE HEIGHT / MM **5,2**
DOWNSTOP / MM **5,8**
UPWNSSTOP / MM **-**
STABILIZER Ø / MM **1,2**
LOW ARM C04M1 ☐ 0,5 ☒
STEER. ARM AM14A ☒ ☐
WHEEL SPACER / MM **-**
FRONT DRIVE GD3 ☐ SPOOL ☒ GB2B ☐ LOW ☒ HIGH ☐
DIFF. OIL ☐ DIFF WASHERS ☐
DOGBONE DRIVE ST17 ☒ ST11 ☐ ST12 ☐ BB ☒ ST02 ☐
WHEELHUB AM06WL ☒ AM06S-M ☐ AM06W ☐

SHOCKS SET
ROTOR STD ☒ ☐
SPRING STD ☐ S ☒
DAMPER D2.2 ☒ ☐
ACTION SYM. ☐ ASYM. ☐
SRS/RHS ARR. I ☒ II ☐

REAR

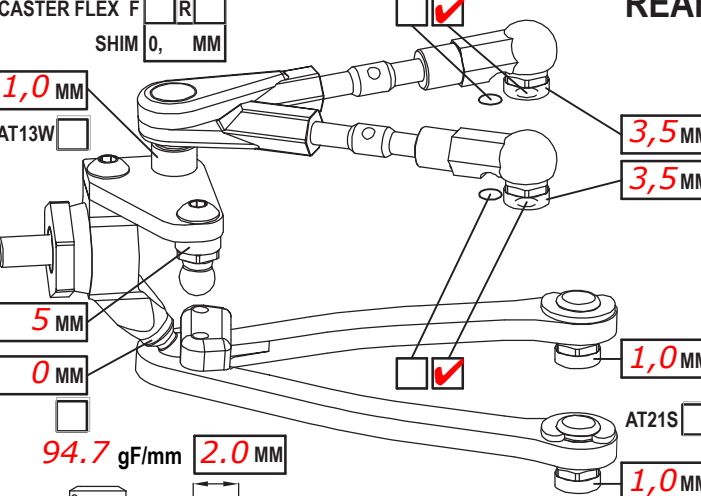


CASTER FLEX F ☐ R ☐
SHIM 0, MM
AT13W ☐ 1,0 MM
AT21S ☐ 3,5 MM
5 MM
0 MM
94.7 gF/mm 2.0 MM
1,0 MM

CAMBER ANGLE / ° **2**
CASTER ANGLE / ° **-2**
TOE ANGLE / ° **2,25**
RIDE HEIGHT / MM **5,4**
DOWNSTOP / MM **4,8**
UPWNSSTOP / MM **-**
STABILIZER Ø / MM **1,1**
LOW ARM C04M1 ☒ ☐
STEER. ARM AM23 ☒ ☐
WHEEL SPACER / MM **-**
REAR DRIVE GD3R ☐ GB2B ☒ LOW ☒ HIGH ☐
DIFF. OIL **7000** DIFF WASHERS **std.**
DOGBONE DRIVE ST11 ☐ ST12 ☐ BB ☒ ST17 ☐ EVD ☐
WHEELHUB AM06WL ☒ AM06S-M ☐ AM06W ☐

SHOCKS SET
ROTOR STD ☒ ☐
SPRING STD ☐ S ☒
DAMPER D2.2 ☒ ☐
ACTION SYM. ☐ ASYM. ☐
SRS/RHS ARR. I ☒ II ☐

FRAME FLEX SETTING

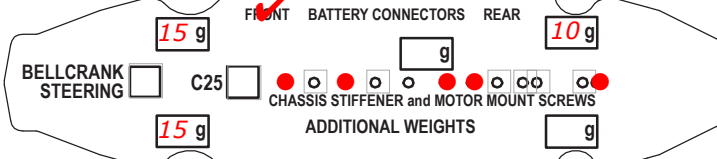

BELLCRANK STEERING ☐ C25 ☐ CHASSIS STIFFENER and MOTOR MOUNT SCREWS
ADDITIONAL WEIGHTS ☐ g

LOWER DECK **Carbon 2.2mm**
CHASSIS STIFFENER AM110 ☐ AM115 ☐ ST130 ☐ ST165 ☒
C26 ☒ ST55 ☒ C26 ☐
TOP DECK CUTS
ST09 TOP DECK C27X ☒ VTD ☐ ST09 ☐
AM98 STD ☐ CUT ☐ AT63 ☐ AT63 ☐ C38 ☐ AM98 STD ☐ CUT ☐

TIRES FRONT REAR
BRAND **Volante**
INSERTS **std.**
WHEELS **std.**
ADDITIVE **MR33**

MOTOR LATERAL SHIFT / MM **0**
MOTOR **Handout 13,5T**
SPUR **100** PINION **38** RATIO **5.00**
BODY **Pf LTC-R LW**
WING **LW Wing**
ESC **LRP Flow WT**
ESC SETTING **0-Boost**
BEST LAPTIME **13,2** QUALIF./FINAL POSITION **1** / **1**
CONTACT **Max@Awesomatix.com**

ACKERMANN SHIMS / MM **0**
SERVO **Futaba BLS571**
STEER TRAVEL IN **25** OUT
BATTERY **LRP 6400 SS LCG**
RECEIVER **Futaba**
RADIO **Futaba 4PX-R**

COMMENTS
FF lower balls are AT21+0,5S
FR, RF, RR are AT21