
XPRESS EXECUTE FT1 SET-UP SHEET

Driver	Dominick Baitz	**Track Surface**	smooth			**Track Temperture**	
Date	24.05.2020	**Track Traction**	low-medium	**Result**	TEST	**Air Temperture**	18°C
Track	MAC Meckenheim	**Country**	Germany	**Best Lap**		**Humidity**	cloudy/windy

Remark technical/small

Front / Rear

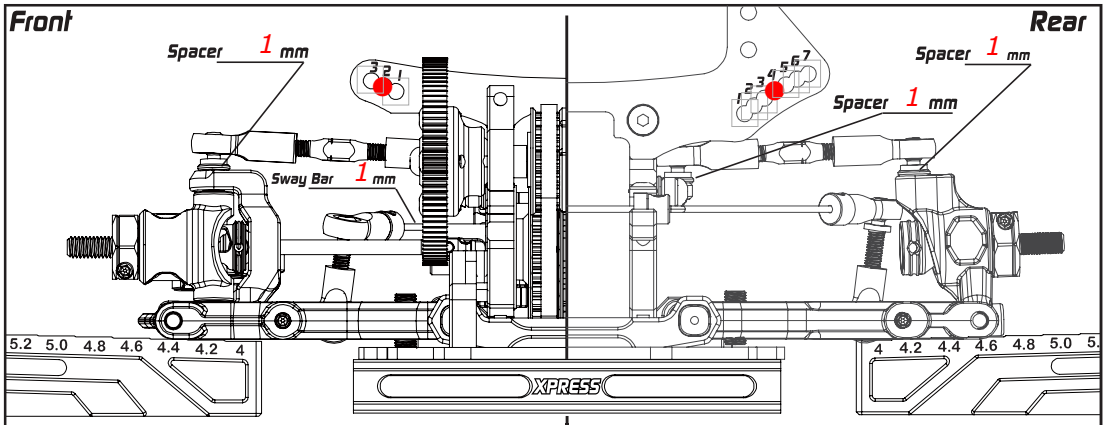

	Front	Rear
Hex Offset	5mm mm	5mm mm
Camber	-2 °	-1 °
Ride Height	5.2 mm	5.4 mm
DownStop	5.4 mm	4.4 mm
Sway Bar	1 mm	1.2 mm

C-Hub ☑ M ☑ H


Steering Block ☑ M ☑ H

Suspension Arm ☑ M ☑ H

Rear Hub ☐ M ☑ H

Suspension Arm ☐ M ☑ H

Optional — On-Power Control System

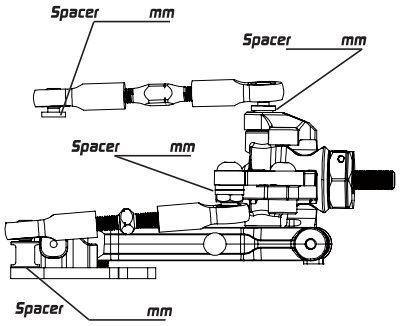

Hex Offset mm

Camber °

Ride Height mm

DownStop mm

Sway Bar mm

Steering Block ☐ M ☑ H

Suspension Arm ☐ M ☑ H

Front

Toe Out 0 °

Front Tire Additive Arena ☑

Lower Arm Spacer 0 mm

Spacer 3 mm

Bump Steering Spacer 1.5 mm

☑ 1 ☐ 2

Link Spacer 1 mm

Weight g

Spacer 0 mm

Wheelbase Spacer

FF 0.3 mm

FR 1.7 mm

☐ Floating Steering ☑ Non-Floating Steering

Rear

Rear Toe In 2.5 °

Rear Tire Additive Arena ☑

Lower Arm Spacer 0 mm

Shock Tower Spacer 0 mm


Link Spacer 1 mm


Wheelbase Spacer

RF 1 mm

RR 1 mm Weight g

Suspension Mount Setup

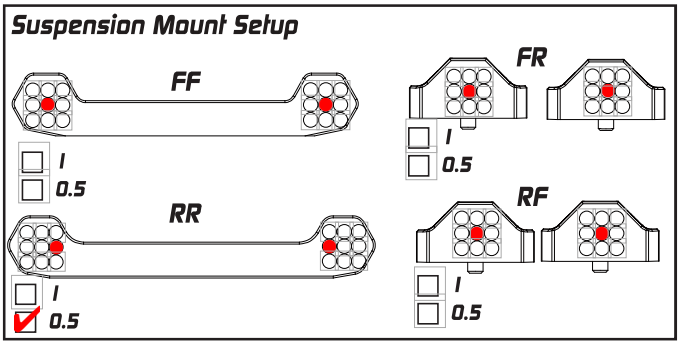

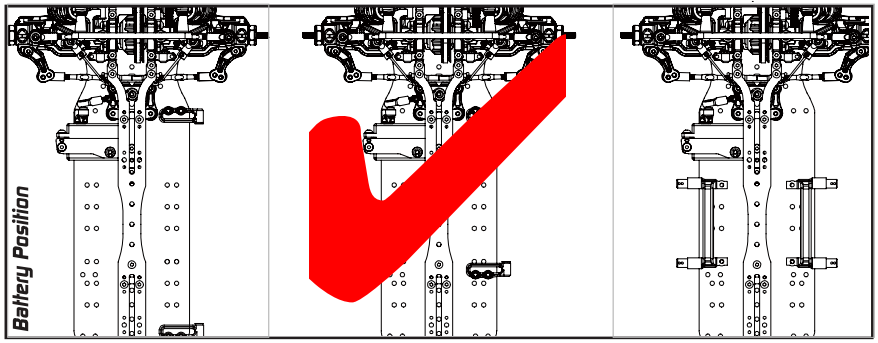

Damper Setup

	Front	Rear
Spring	Xray 2.5-2.8	2.7
Oil	MR33 350	400
Rebound	0	0
Piston	4	4
Length		
Foam Insert	☐	☐
Hole In Cap	☐	☐

Transmission Setup

Front

Gear Diff

Oil 300k

Weight 1.5 g

Position down

Others

Servo SRT D1 Tires Ride Pre Cut

Esc HW XR10 Justocj Additive

Motor 17.5 Justock G2 Body HCF

Spur 48 P/ 76 T Rear Wing Std

Pinon 48 P/ 32 T FDR 4.5

NOTES

Top Deck rear stiffener, Suspension Mount FF&FR brass,brass weight front&rear, hard suspension